

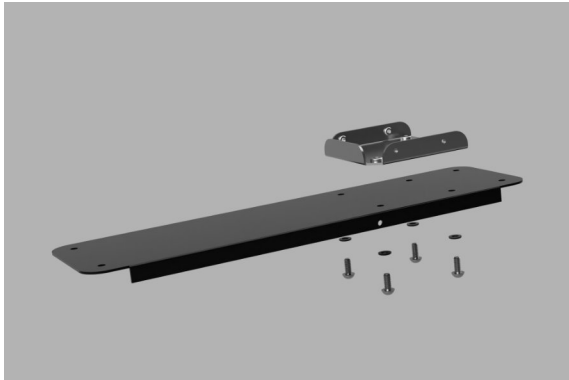


Red Light Tower 2 Stand Assembly Instructions


Completed Red Light Tower Stand



Install tower attachment plate using the 4 1/4-20 washer head screws and plastic washers, Using the 5/32 hex wrench.

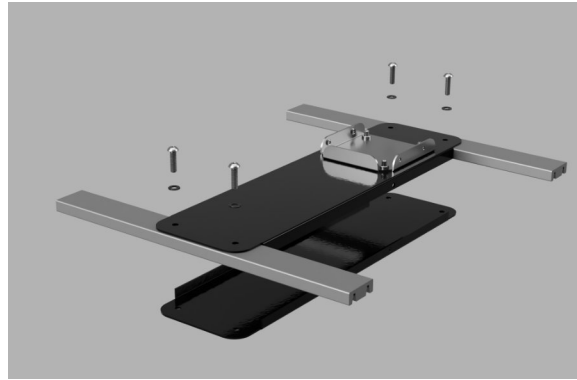


Take both top and bottom base plates and fit them together with the sides of the top plate overlapping the side of the bottom. Insert both legs making sure holes line up perfectly, then secure using 1/4-20 button head & large hole medium washers.

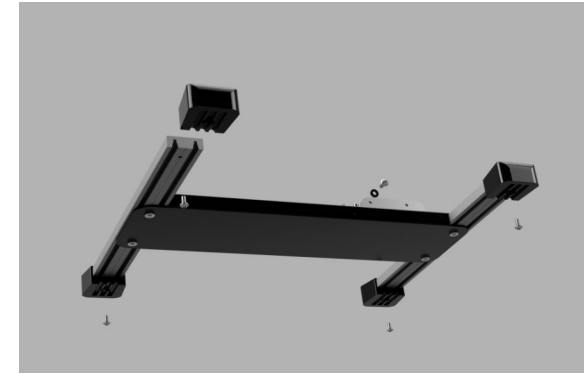


Install the 4 rubber feet on legs and side base plate using the 10-24 button head screws with a 7/64 hex wrench. Along with washer for side base screws.



Line up the holes on the the side of the Tower with the threaded holes of the handle. Use 10-24 button head screws and washers with 7/64 hex wrench and attach

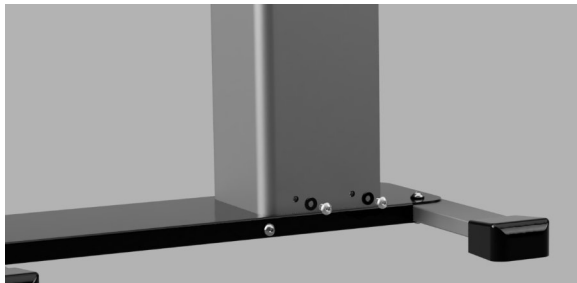

Attach tower to the tower attachment plate with the 4 remaining 10-24 screws and washers using the 7/64 hex wrench, attachment plate.

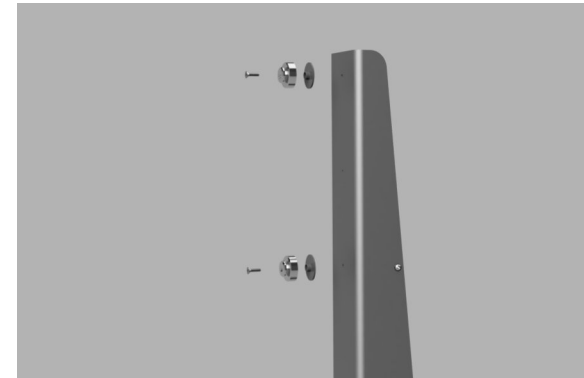

Install the 2 stainless fixture mounting pins with the isolation washers as shown with the #2 Phillips screws on both the top and bottom mount holes. Once screws are securely fastened apply the protection labels