

Clearlight®

How To Change a LED Strip

What You will Need:

- Phillip's Head Screw Driver
- Fastcaps

Important: Unplug the Sauna before starting. Make sure you have extra Fastcaps provided by Clearlight Saunas. Outside LED Strips are connected through the inside.

Step 1: To replace the LED strip you must remove the corresponding heater guard. The heater guards are attached to the walls of the Sauna. Behind little round wood fastcaps you will find the screws to detach the heater guard. Simply puncture the fastap with your screw driver to reveal the screw.


Step 2: Once the heater guard is removed it will reveal the molex connectors for the LED strip. Behind the heater guard is a host of wires, look for the black and red wires and find the corresponding molex connectors. Unconnect each molex to free the original LED strip.

Step 3: The original LED strip may have an adhesive sticking it to the Sauna, simply peel it back and remove the original LED strip.



Step 4: Take the new LED strip and re-connect the molex connectors. Make sure the wires are fished through the proper holes, avoiding any pinched wires. The new LED strip won't need any new adhesive as it was intended for keeping the original LED strip in place during transportation.

Step 5: Before screwing back on the heater guard make sure to test to the LED light to make sure it is working. Once the LED is working screw the heater guard back into place and use the provided fastcaps to cover the visible screw holes.

Below are helpful images illustrating the above process.

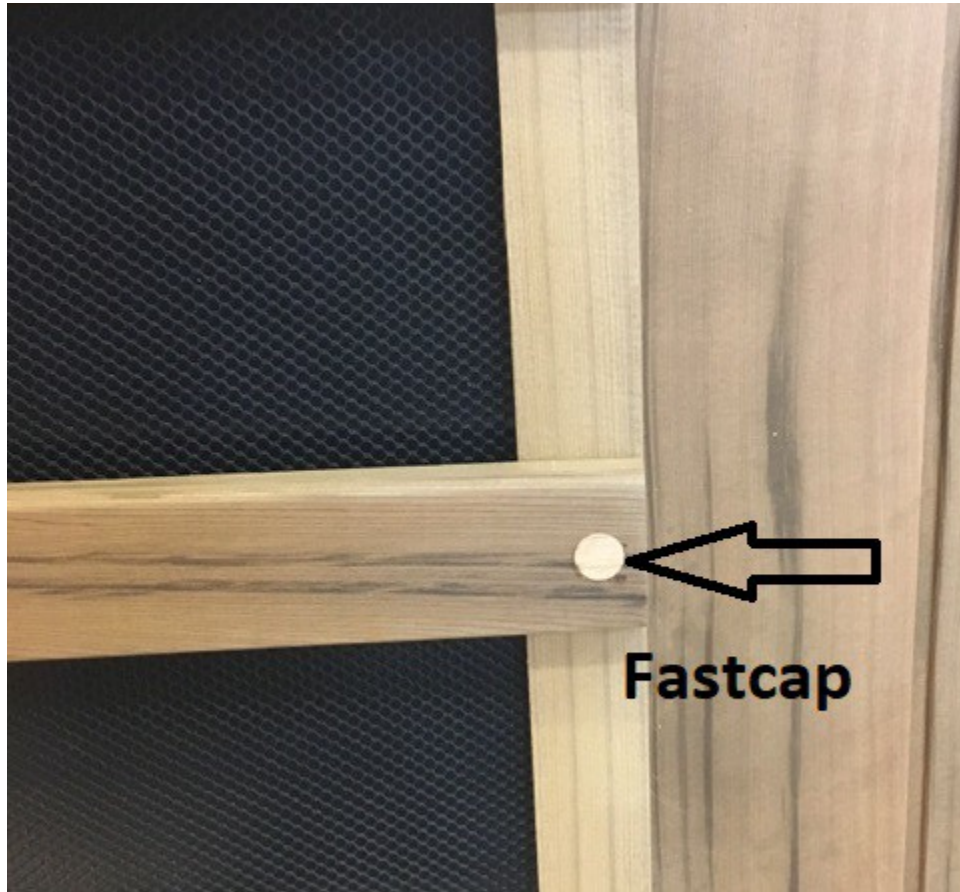

How To Change a LED Strip

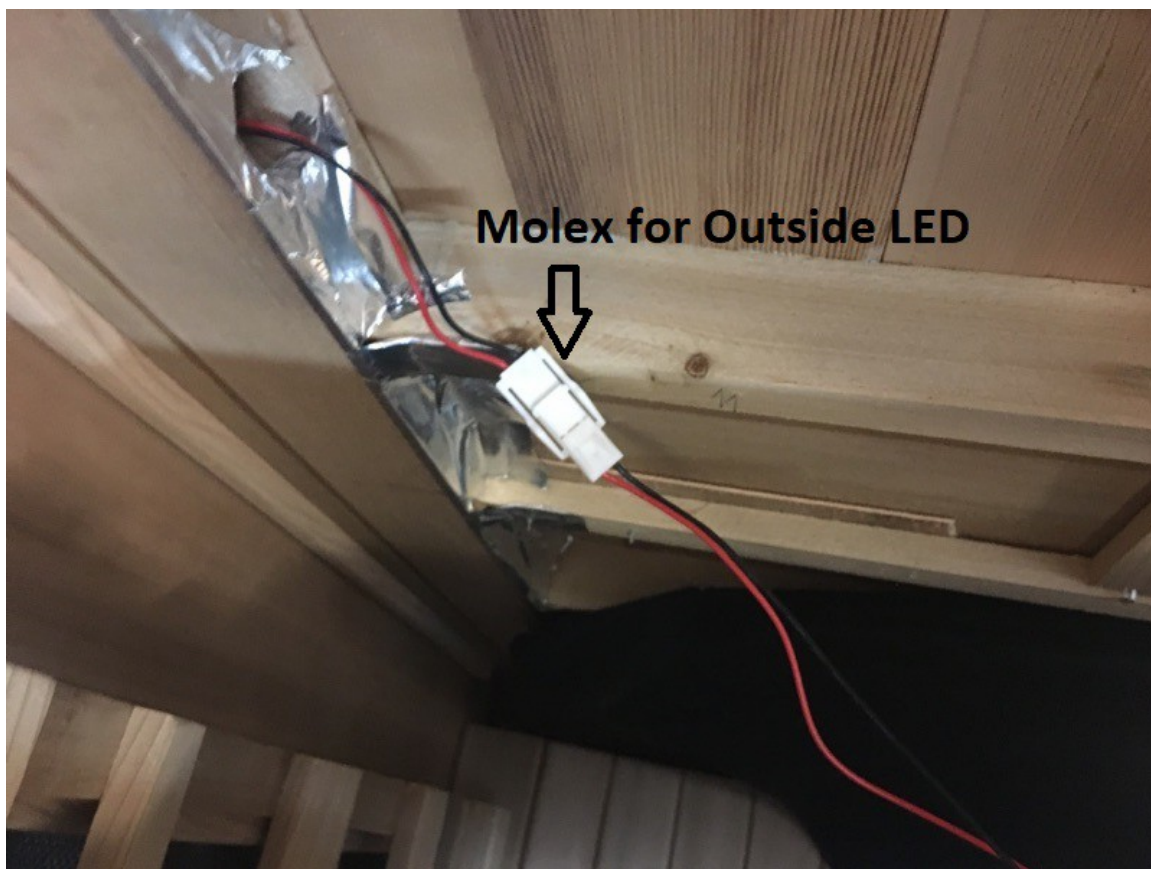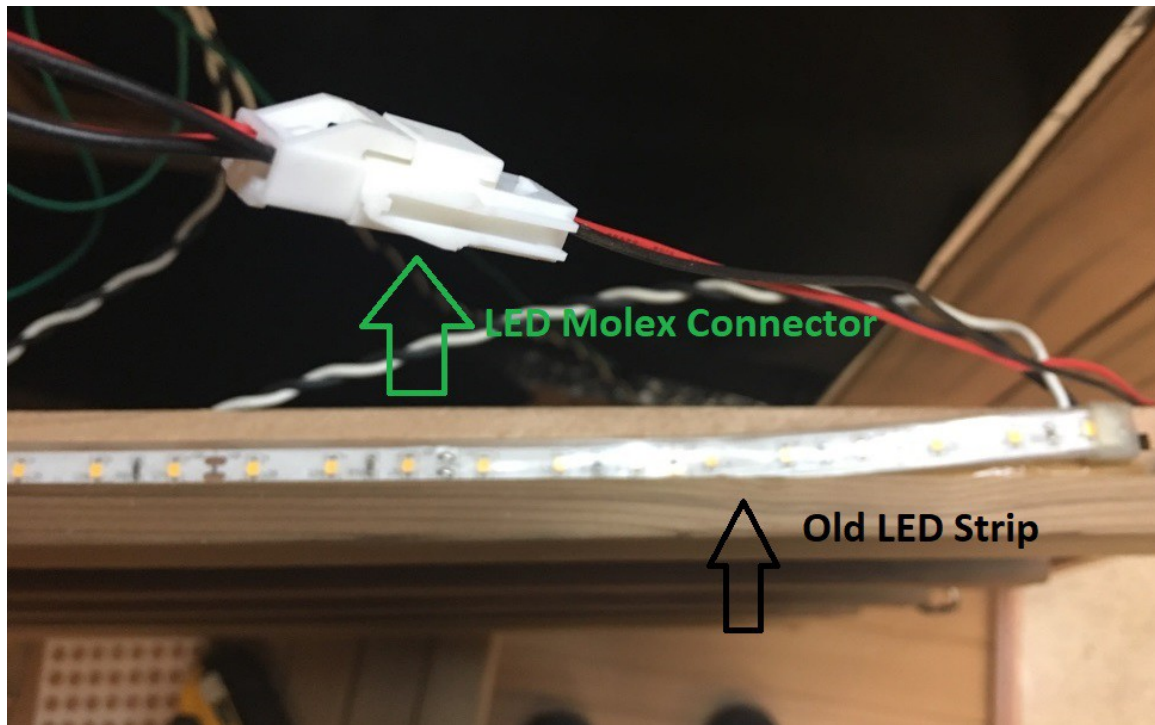

How To Change a LED Strip